

StreamLine

StreamLine GPRS/GPS Module Rev9



The StreamLine GPRS/GPS Modules enable you to remotely track & trace a variety of objects, e.g. cars, trucks, containers or ships. Its small, lightweight aluminum design makes it easy to install and together with the extended position logging, it's ideal for use in fleet management, anti-theft and M2M applications. The numerous I/O's allow monitoring and control of a range of external hardware, like cameras and iButtons™

Key Features

- Extremely small and lightweight, ruggedized aluminum enclosure
- Wide operating temperature range
- Quad-band for worldwide coverage
- Ultra low power consumption
- Optional internal Li-ion battery
- Excellent GPS accuracy
- Multiple watchdog levels for maximum stability
- Versatile interfacing: Digital+Analog, Serial (3V / RS232), iButton/1-Wire™, Cameras, LCD display+keypad, Sensors, Digital Tachograph, passive/active RFID, Garmin™ displays, etc.
- 5V/1A power supply for peripherals (Li-Ion version)
- Remote configurable to fit any job
- Configuration can be both Server and Event driven, 300+ different events
- Field upgradeable firmware via GPRS
- Supports backup server configuration
- User definable SMS commands
- Standalone scripting language
- Distance measurement for trip / ODO
- Long term investment, hardware and software compatible since 2004
- 1 year full warranty. 3 or 5 years optional.

Applications

- Object Protection
- Fleet management
- Public transport /Railway industry
- Logistics
- M2M
- Security and surveillance
- Remote control and diagnostics
- Vehicle immobilisation

Product Summary

Equipped with a state-of-the-art GPS receiver, the StreamLine Module provides reliable and accurate navigational data.

All communication is handled rapidly and effectively by a GPRS/GSM modem (QUAD band version) through a GPRS network. In areas without network coverage, position-data and events are stored in memory (up to 500,000 positions). As soon as communication is restored, all information can be transmitted.

A unique feature is the user-configuration menu, which controls events like sending position-information and switching of external hardware.

All of the necessary server-side scripts to process and store data from the StreamLine units are available.

If you do not want to host data and maps yourself, you can use our hosting services or one of our many partner companies.

About



AAN was founded in The Netherlands in 1994. AAN develops and manufactures electronics in-house for industrial applications, medical purposes, broadcasting solutions, etc.

Support

Support available at www.yourstreamline.com or contact one of our highly trained StreamLine resellers worldwide.



StreamLine

Specifications StreamLine/TraceME Rev9-Basic

Data Communication

Modem	Telit GE865 QUAD-band 850/900/1800/1900 GPRS	
RF Power	Class 4 (2W) @ 850 / 900 MHz Class 1 (1W) @ 1800 /1900 MHz	
Sensitivity	850/900 MHz GPRS	-107 dBm
	1800/1900 MHz GPRS	-106 dBm
Data	GPRS	Class 8 + 10
	Coding schemes	CS1 to CS4
SMS	Point-to-Point mobile originated & mobile terminated	
	Cell Broadcast	

Navigation

GPS Receiver	65 channel Venus634/638LPx	
Frequency	L1 1575.42 MHz	
Acquisition Time (TTFF)	Hot start	1 sec
	Cold start	29 sec
Position Accuracy	2.5 meter (CEP), 2 meter (CEP with WAAS, EGNOS)	
Sensitivity	Cold start	-148 dBm
	Re-acquisition	-155 dBm
	Tracking	-161 dBm
Antenna	Passive, active	

Physical

Outside Dimensions	Size	90x67 mm (excluding antenna connectors)
	Height	20 mm
	Weight	Approx. 110 grams (without battery)
Connections	GPRS/GSM	SMA
	GPS	SMA
	Power/IO	Molex 43045-0412 (4 pins) + 43045-2412 (24 pins) or Molex 43045-0812 (8 pins) Optional: Amp 2029030-3 (3 pins for CAN/RS-485)

StreamLine

Electrical

Operating Voltage	External +6...+31VDC	
Power Consumption	<p><5 mW standby</p> <p>300 mW tracking , full power. Approx. 9 W peak during data transmission</p> <p>Power consumption depends on amount of GPRS traffic and navigation parameters</p>	
External Connections (Basic version)	Serial Communication (3V combined Rx/D / Tx/D)	One-Wire / iButton™ Generic serial
	Input / Output	2x combined open collector output + digital+analog in, max 31V 1x digital+analog in, max 31V 1x 3V digital in/out, overlaps serial
	Peripheral power supply	Board Voltage out (3.5 ... 4.2 Volt), max 250 mA
External Connections (Full I/O version)	Serial Communication (dual 3V, dual RS232)	One-Wire/ iButton™ / Cameras / LCD / generic RS232
	Input / Output	5x digital+analog in, max 31V 4x digital out, open collector 2x 3 Volt in/out, overlaps serial
	Power supply	3.3V controlled by module, 150 mA max

Environmental


Enclosure	Aluminum with black anodised finish. Black ABS front lid.
Operating Temperature	<p>Without Li-Ion battery: -25°C to +85°C (-13°F to +185°F) non-condensing</p> <p>With Li-Ion battery: -20°C to +60°C (-4°F to +140°F) non-condensing</p> <p>Li-Ion battery cannot charge outside 0°C to +45°C (+32°F to +113°F).</p>
Storage Temperature	Without Li-Ion battery: -40°C to +85°C (-40°F to +185°F) non-

StreamLine


External Hardware

1-Wire™	Sensor count	Max. 30
	Cable type	2 wire, 3 wire for temperature
	Temperature	DS18B20 / DS18S20 / DS1822
	ID (input)	DS2411
	iButton	Any for ID only
Camera (with full I/O version)	Sensor	OmniVision™
	Resolution	Up to 640 x 480 Colour
	Format	JPEG
	Colour Depth	16 bits
	Lens	f4.0 mm / F 2.2

Front view Power and I/O-Connectors

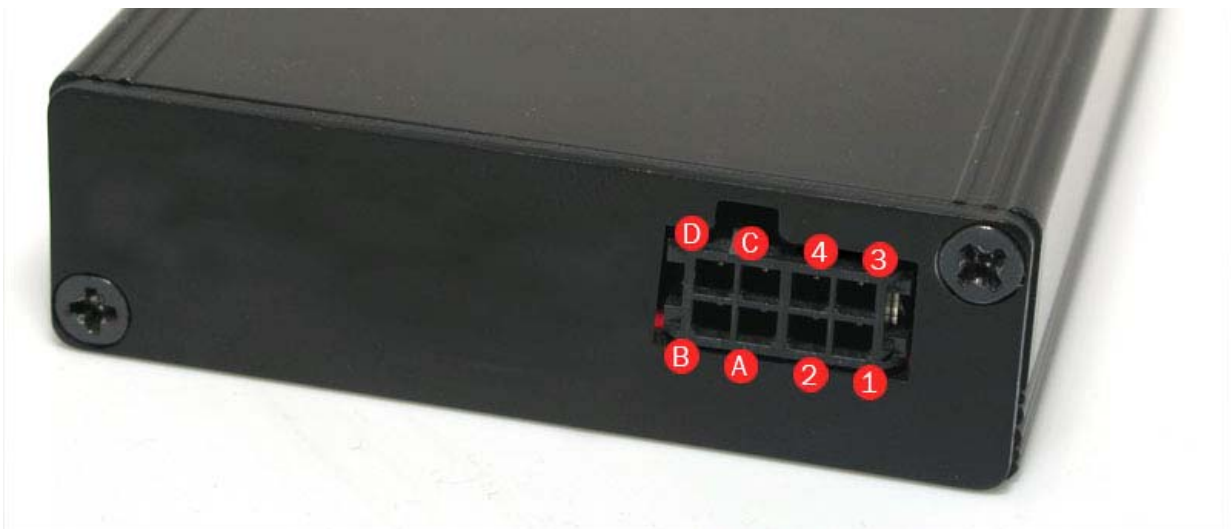

Front view Power and I/O-Connectors (full I/O)

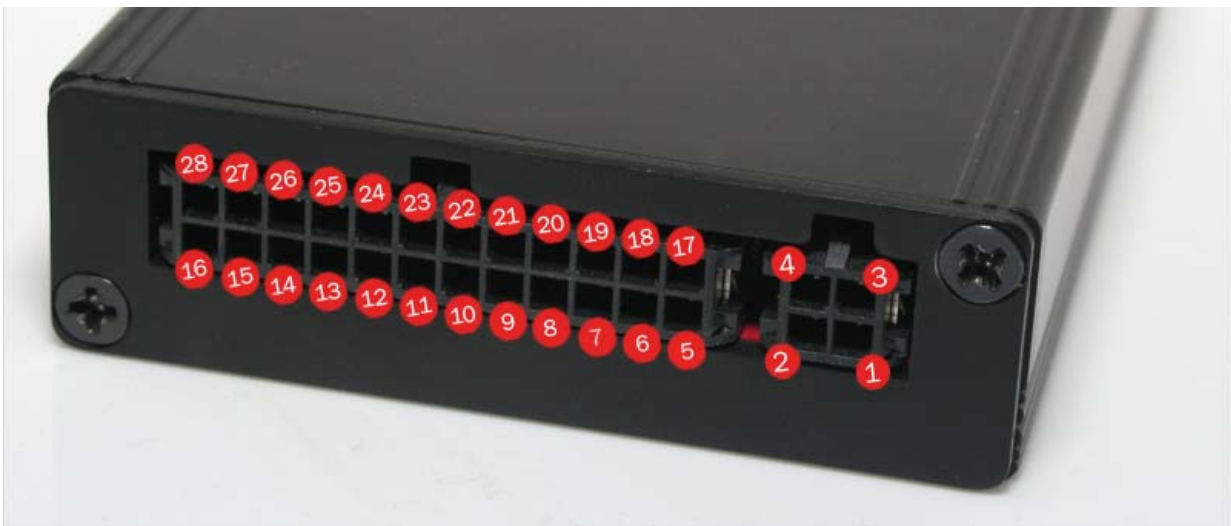

StreamLine

External Connections StreamLine/TraceME (Full I/O)

Pin	Signal	Type	Description
1*	GND for VCC	GND	Ground for VCC
2*	VCC	VCC	+5...+31VDC or VCC Charge input
3*	GND for I/O	GND	Ground for I/O
4*	Digital/Analog_In5	I	Digital/Analog Input 5 (0..31V)
5	TXD1_3V	O	3 Volt serial transmit port 1
6	RXD1_3V	I	3 Volt serial receive port 1, hardware pulse counter
7	TXD2_RS232	O	RS232 serial transmit port 2
8	TXD2_3V	O	3 Volt serial transmit port 2
9	GND for I/O	GND	Ground for I/O
10	I/O1 or RXD4_3V or One-Wire™ or ADC6	I/O	I/O1 (3 Volt) or RXD4 (e.g. Camera1) or One-Wire™ or ADC6, max 1.0 V
11	I/O2 or TXD4_3V or One-Wire™	O	I/O2 (3 Volt) TXD4 (e.g. Camera1) Note: Connect pins 10-11 for One-Wire™ operation
12	Digital_Out1	O	Open Collector max. 31V /160 mA, protected via Polyswitch fuse
13	Digital_Out2	O	Open Collector max. 31V /160 mA, protected via Polyswitch fuse
14	GND for I/O	GND	Ground for I/O
15	Digital_Out3	O	Open Collector max. 31V /160 mA, protected via Polyswitch fuse
16	Digital_Out4	O	Open Collector max. 31V /160 mA, protected via Polyswitch fuse
17	TXD3_RS232	O	RS232 serial transmit port 3
18	TXD3_3V	O	3 Volt serial transmit output 3
19	RXD3_RS232	I	RS232 receive input 3
20	RXD2_RS232	I	RS232 receive input 2
21	VCC_3V3	VCC	External Supply 3.3V switchable by module
22	VCC_5V	VCC	External Supply, 5V+-5%, 1 Amp max. **
23	N/C	-	Reserved
24	Digital/Analog_In1	I	Digital/Analog Input 1 (0..31V)
25	Digital/Analog_In2	I	Digital/Analog Input 2 (0..31V)
26	N/C	-	Reserved
27	Digital/Analog_In3	I	Digital/Analog Input 3 (0..31V)
28	Digital/Analog_In4	I	Digital/Analog Input 4 (0..31V)

A	Serial in/out	I/O	3V serial transmit/receive1, iButton, Input IN3
B	Digital OUT1 + IN1	I/O	Digital/Analog Input 1 (0..31V) + Open Collector max. 31V /160 mA, protected via Polyswitch fuse
C	Board voltage	O	Max 250mA
D	Digital OUT2 + IN2	I/O	Digital/Analog Input 2 (0..31V) + Open Collector max. 31V /160 mA, protected via Polyswitch fuse

* Pins 1-2-3-4 are identical for Full I/O and Basic version.

** Available on Li-Ion version only

StreamLine

External Connections StreamLine/TraceME (Full I/O)

	Rev9	Rev9-Basic
Introduction date	Nov-2010	Nov-2010
Outside Dimensions	100 x 67 x 20 mm Aluminum housing, ABS front lid	100 x 67 x 20 mm Aluminum housing, ABS front lid

GPRS/SMS

QUADBAND 850/900/1800/1900 Mhz	<input type="checkbox"/>	<input type="checkbox"/>
Antenna connection	SMA / micro-coax	SMA / micro-coax
GPRS antenna included	-	<input type="checkbox"/>

GPS

Tracking sensitivity / channels	-161 dBm / 65 ch	-161 dBm / 65 ch
Antenna sensing circuitry	<input type="checkbox"/>	<input type="checkbox"/>
Antenna connection	SMA / micro-coax	SMA / micro-coax
GPS antenna included	-	<input type="checkbox"/>

Power

Internal Backup battery	Li-Ion / Li-Polymer 1100 mAh (optional)	Li-Ion / Li-Polymer 560mAh (optional)
Average tracking power (GPS full power, GPRS connected)	300 mW	300 mW
Minimum power consumption	<5 mW at 6..31V	<5 mW at 6..31V
Power cable + fuse included	-	<input type="checkbox"/>

IN/OUT

Connector	4 + 24 pins, 3 pins for CAN-bus/RS-485	8 pins, optional 4 + 24 pins
Digital / Analog Inputs	5	3 (combined IO1+IO2, IN5) *
Digital outputs (max. 31 Volt)	4	2 (combined IO1+IO2)
Camera interface	4	-
RS-232 connections	2 RXD + 2 TXD	-
3V serial connections	2 RXD + 2 TXD	1 combined RXD-TXD or IN3
1-Wire / iButton™ interface	<input type="checkbox"/>	iButton only

Miscellaneous

Internal 3 axis acceleration / G-force sensor	optional	optional
CAN-bus support (2.0B, up to 1 MBit)	optional	-
RS-485 support	Optional (Q1/2011)	-
Internal Vibration sensor on Li-Ion version	<input type="checkbox"/>	<input type="checkbox"/>
Maximum items in log	55,000 / 500,000+ (optional)	6,000

* Rev9-Basic has two pins that can function as both Input and Output (IO1+IO2) and one input-only pin (IN5). These 3 pins are all 0..31V capable. IN3 has a default range of 0..3V, but can be externally adapted to a 0..31V range.

StreamLine

Final notes, Certification and Disclaimer

We certify that AAN BV does not make any hardware or IMEI modifications to the Telit GE865 devices as used in the StreamLine track&trace device. All software modifications are restricted to official firmware upgrades as provided by Telit Communications PLC.

WARNING:

- The device should be turned off in vicinity of petrol pumps, chemical, flammable or hazardous environments where ignition of flammable atmospheres is possible.
- The GSM unit and antenna shall be operated at a distance greater than 20 cm from the human body.
- The device is to be operated in accordance with the user instructions or manufactured recommendations.

THE MATERIALS ARE PROVIDED "AS IS" WITHOUT ANY EXPRESS OR IMPLIED WARRANTY OF ANY KIND INCLUDING WARRANTIES OF MERCHANTABILITY, NONINFRINGEMENT OF INTELLECTUAL PROPERTY, OR FITNESS FOR ANY PARTICULAR PURPOSE. IN NO EVENT SHALL AAN BV OR ITS SUPPLIERS BE LIABLE FOR ANY DAMAGES WHATSOEVER (INCLUDING, WITHOUT LIMITATION, DAMAGES FOR LOSS OF PROFITS, BUSINESS INTERRUPTION, LOSS OF INFORMATION) ARISING OUT OF THE USE OF OR INABILITY TO USE THE MATERIALS, EVEN IF AAN BV HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES. BECAUSE SOME JURISDICTIONS PROHIBIT THE EXCLUSION OR LIMITATION OF LIABILITY FOR CONSEQUENTIAL OR INCIDENTAL DAMAGES, THE ABOVE LIMITATION MAY NOT APPLY TO YOU.

AAN BV and its suppliers further do not warrant the accuracy or completeness of the information, text, graphics, links or other items contained within the Materials. AAN BV may make changes to the Materials, or to the products described in those Materials, at any time without notice. AAN BV makes no commitment to update the Materials.